
Multi-Fit Downlight 18W 3000K 1440Im, Adjustable 65-205mm cut-out, Nondimmable

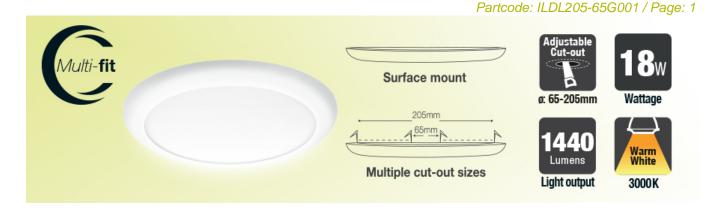

This ultra-thin (15.5mm) downlight is supplied with configurable brackets and clips allowing for installation in a cut-out from 65-205mm as well as having a surface mount installation option. Visible flicker is eliminated with the integrated driver and a frosted diffuser provides uniform light.

Watch Video

Product Details

Partcode: ILDL205-65G001 Check Code: 702853 Range Name: Multi-Fit Placement / Application: Indoor, General Lighting Market Segment: Commercial indoor, Residential indoor Product Type: CFL-PL and 2D replacements Warranty: 3 Years CE / RoHS: Yes

Physical Data

Product Finish: Matt white Optic: Opal diffuser Material: Aluminium, PS Construction: Die cast Aluminium body, PS sheet diffuser

www.integral-led.com

Partcode: ILDL205-65G001 / Page: 2

Physical Data

Depth: 16mm Diameter: 230mm Weight (Unpackaged Single Unit): 310g Cut Out Diameter: 65-205mm Lamp or Luminaire Shape: Round Luminaire Fixing: Recess or surface mounted

Electrical Data

Voltage Range: 220-240V Power Consumption: 18.0 Watts Driver included: Integrated Electric Current: AC Power Factor: >=0.50 Wattage Equivalent: 26 Watts Dimming: Non-dimmable LVD Certified: Yes EN: EN-60598

Light Data


Lumens: 1,440lm Lumens per Watt: 80.0lm/W Beam Angle: 120^o Correlated Colour Temperature (CCT): 3,000k Colour Temperature: Warm White Colour Rendering Index (CRI): >=80 LED Type: Surface mounted device (SMD) Instant on - Less than 1 second: Yes Lifetime: 30,000 hrs Switching Cycles: >15,000 X

www.integral-led.com



Partcode: ILDL205-65G001 / Page: 3

Environmental



Lowest Operating Temperature: -20 degrees Maximum Operating Temperature: 40 degrees IP (Ingress Protection) Rating: IP20 Hg 0% (Mercury Free): Yes

Packaging



EAN Barcode (unit of 1): 5055788236603 Packaged Weight (Unit of 1): 400g Length (unit of 1): 275mm Width (unit of 1): 239mm Depth (unit of 1): 30mm **Outer packaging info available on website**

Product data last updated on: Monday, August 20, 2018 - 17:09

www.integral-led.com