

Lux Hi-Brite 60 Tiltable Downlight 60mm cutout 9W 715lm 82lm/W 3000K Non-Dimmable Finish-F Matt Black

Partcode: ILDL60K010 / Page: 1



Lux Hi-Brite range is uniquely designed to provide maximum lumen output from a very compact body. Minimum glare is achieved from a deep-recessed construction, guaranteeing comfortable light. Lux Hi-Brite downlights are ideal for applications requiring high performance in limited spaces, such as hospitality, retail or commerce.

The stylish fixed and tiltable finishes can illuminate a wide range of areas. Complement with Lux Mini range for coherent multilevel lighting design.

Product Details

Partcode: ILDL60K010

Check Code: 733141

Range Name: Lux Hi-Brite 60 Tilt

Placement / Application: Indoor, General Lighting

Market Segment: Commercial indoor, Residential indoor

Product Type: LED Downlights

Warranty: 3 Years

CE / RoHS: Yes

Physical Data

Product Finish: Matt Black

Optic: PMMA lens

Material: Aluminium

Partcode: ILDL60K010 / Page: 2

Physical Data

Depth: 52mm

Diameter: 70mm

Weight (Unpackaged Single Unit): 210g

Cut Out Diameter: 60mm

Luminaire Fixing: Wall/Ceiling mounted

Electrical Data

Power Consumption: 9.0 Watts

Driver included: Yes

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN 60598, EN 55015, EN 61547, EN 61000

Light Data

Lumens: 715lm

Lumens per Watt: 82.0lm/W

Beam Angle: 30°

Correlated Colour Temperature (CCT): 3000k

Colour Temperature: Warm White


Colour Rendering Index (CRI): ≥ 80

LED Type: Chip-on-board (COB)

Lifetime: 60,000 hrs

Switching Cycles: $>15,000$ X

Environmental

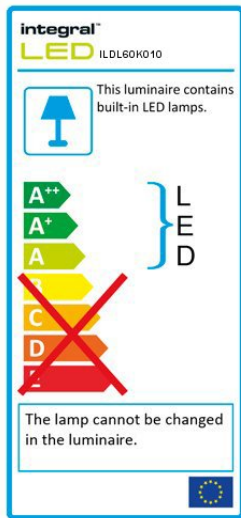

Lowest Operating Temperature: -10 degrees
Maximum Operating Temperature: 40 degrees
IP (Ingress Protection) Rating: IP20
Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788250654
Packaged Weight (Unit of 1): 280g
Length (unit of 1): 110mm
Width (unit of 1): 110mm
Depth (unit of 1): 75mm

Outer packaging info available on website

Product data last updated on: Thursday, February 27, 2020 - 11:15