

**SURFACE EMERGENCY DOWNLIGHT IP44 130LM 1W 6000K 3HR
NON-MAINTAINED CORRIDOR TEST BUTTON INTEGRAL**

ILEMDL064



This compact and attractive surface mounted emergency downlight provides three hours of light in the case of a power outage. This white downlight features specially engineered optics that project light in a narrow beam for illuminating corridors.

Details

Quick Order Code:	101191
Barcode:	5055788239772
Category:	Emergency
Range Name:	Surface-Mounted
Product Type:	Emergency Downlights
Product Body Finish:	Matt white
Market Segment:	Commercial indoor
Finish:	Matt White
Features:	Emergency Function
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	130
Product Depth (mm):	35
Product Width (mm):	130
Product Weight (g):	220
Optic:	Polycarbonate
Material:	Polycarbonate
Construction:	Injection moulding
Bulb or Luminaire Shape:	Rounded square
Luminaire Fixing:	Ceiling
Mounting Type:	Rear Cable Entry
Placement / Application:	Indoor, Emergency Lighting

Electrical Data

Input Voltage (V):	220-240
Dimming:	Non-Dimmable


Driver Included:	Yes
Electric Current:	AC
Emergency Lumens (lm):	130
Emergency Type:	Non-Maintained
EN:	EN-60598
LVD Certified:	Yes

Light Data

Correlated Colour Temperature (CCT) (K):	6000
Colour Temperature Name:	Cool Daylight
Beam Angle:	160
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
Lumens in Emergency mode (lm):	130
Useful Lumens (lm):	130

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP44
Lowest Operating Temperature (°C):	0
Maximum Operating Temperature (°C):	45

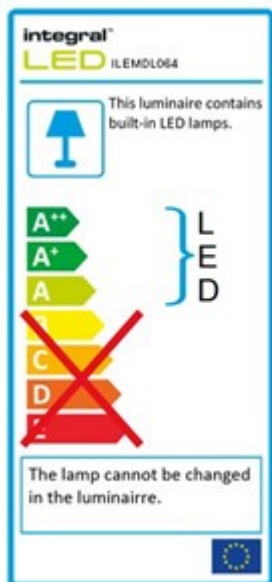

Packaging

Package Length (mm):	230
Package Width (mm):	160
Package Depth (mm):	132

Portal.integral-led.com