

GLS BULB B22 1055LM 9.5W 2700K NON-DIMM 240 BEAM FROSTED INTEGRAL

ILGLSB22NC110



This award-winning premium 9.5W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a warm light and brightness, similar to a 75W filament bulb. It features high output LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for living rooms, hallways and kitchens.

Details

| | |
|--------------------------|---------------------------------------|
| Quick Order Code: | 170850 |
| Barcode: | 5055788258919 |
| Category: | Lamps |
| Range Name: | Everyday |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|---|
| Product Length (mm): | 103 |
| Product Width (mm): | 60 |
| Product Weight (g): | 36 |
| Material: | Aluminium, Polycarbonate, Nickel plated brass |
| Base Term: | Bayonet cap |
| Bulb Base: | B22 |
| Construction: | Aluminium and Plastic heat-sink, Injection moulded diffuser |
| Globe Finish: | Frosted |
| Globe Type: | GLS |
| Bulb or Luminaire Shape: | Round |
| Placement / Application: | Indoor, General Lighting |
| Spot Type: | SMD |

Electrical Data

| | |
|-------------------------------|-----|
| Power (W): | 9.5 |
| Power Consumption (w): | 9.5 |
| Power Factor: | 0.5 |



| | |
|-------------------------|--------------|
| Wattage equivalent (W): | 75 |
| Amperage (mA): | 72 |
| Dimming: | Non-Dimmable |
| Driver Included: | Yes |
| Electric Current: | AC |
| True Wattage Eq (W): | 75 |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|--|------------------------------|
| Luminous Flux in Lumens (lm): | 1055 |
| Luminous efficacy (lm/W): | 112 |
| Correlated Colour Temperature (CCT) (K): | 2700 |
| Colour Temperature: | 2700K - Warm |
| Colour Temperature Name: | Warm |
| Beam Angle: | 240 |
| Colour Rendering Index (CRI): | 80 |
| Colour Type: | Single |
| Frequency Range (Hz): | 50/60 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Surface mounted device (SMD) |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 7500 |

Environment

| | |
|-------------------------------------|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Previous Energy Rating: | A++ |
| New Energy Rating: | E |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 40 |

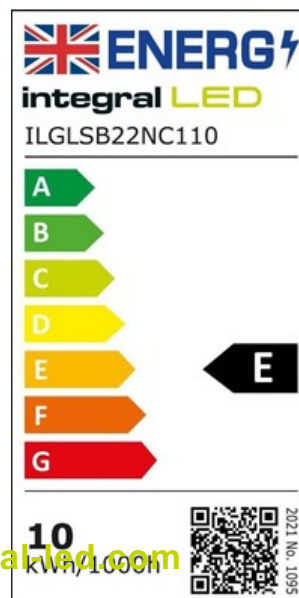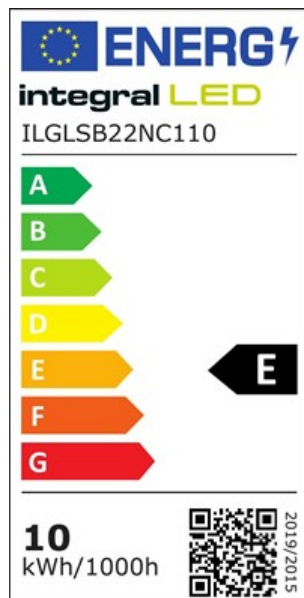

Portal.integralled.com

Packaging

| | |
|----------------------|-----|
| Package Weight (g): | 61 |
| Package Length (mm): | 120 |
| Package Width (mm): | 65 |
| Package Depth (mm): | 65 |