

GOLF BALL BULB E14 470LM 4.9W 2700K DIMMABLE 240 BEAM FROSTED INTEGRAL

ILGOLFE14DC044



This 4.9W retro-fit Integral LED Mini Globe (small screw base) delivers a warm light and brightness, similar to a 40W filament bulb. It features high output, multi Everlight LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms and bedrooms, in classic or modern wall or floor/table lamp fittings.

Details

Quick Order Code:	711676
Barcode:	5055788236665
Category:	Lamps
Range Name:	Everyday
Product Type:	Mini Globe
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	80
Product Width (mm):	45
Product Weight (g):	70
Material:	Plastic, Aluminium, Glass, Nickel plated brass
Base Term:	Small Edison screw
Bulb Base:	E14
Construction:	Plastic and Aluminium heat-sink, glass diffuser
Globe Finish:	Frosted
Globe Type:	Mini Globe
Bulb Fixing:	Pendant, Wall
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	4.9
Power Consumption (w):	4.9
Power Factor:	0.7
Wattage equivalent (W):	40



Amperage (mA):	43
Dimming:	Dimmable
Driver IC Manufacturer:	IWATT
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	96
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	240
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

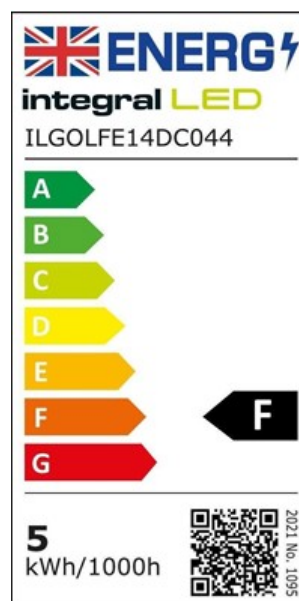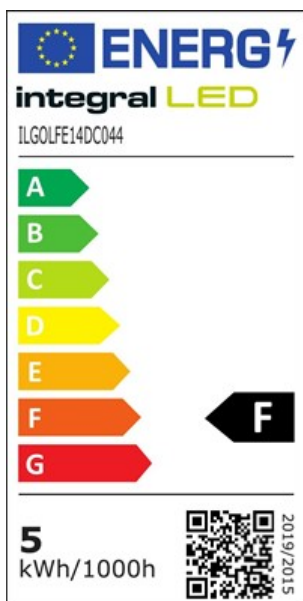

Packaging

Portal.integral-led.com

	30
Package Weight (g):	50
Package Length (mm):	50
Package Width (mm):	90
Package Depth (mm):	