

421061


Technical Specification

## Emergency

### Darwell Emergency Bulkhead 2.5W 6000K LiFePO4 - White



• LiFePO4 battery • Polycarbonate body and diffuser • Maintained / Non maintained • 20mm conduit entry • Loop in / Loop out terminals

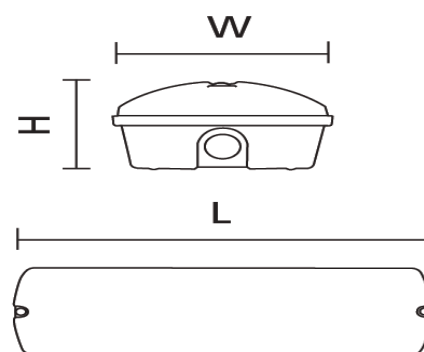

### General Data

Technology	LED
Mounting options	Ceiling Wall
Install Options	20mm Cut Out
Electrical Connector Type	Push fit terminal
Input Cable	0.75-2.5mm <sup>2</sup>
Input Electrical Connection	Live   Neutral P Live
General Application	Commercial   Industrial   Educational
Operating Temperature Range °C	0 - +30
Warranty (Years)	5

421061

## Technical Specification

### Optical Data

LED Manufacturer / Type	Everlight
Fixture Luminous Flux (Lm)	140
Luminaire Efficacy @6000K (lm/W)	140
LOR %	100
Beam Angle°	110
Photobiological Risk Group	RG0

### Light Source Data

Colour Temperature (K)	6000
Light Colour	Daylight
CRI Ra	70

### Electrical Data

Wattage (W)	2.5
Total Power Consumption (W)	2.5
Mains voltage (V)	220 - 240
Lamp power factor	0.8
Electrical protection	Class II
Driver Output (V)	2.5-4
Driver Output Current (mA)	295
Control Gear Type CC or CV	Constant Current
Driver Brand	Luminaireux
Nominal Frequency (Hz)	50/60

### Lifetime Data

Lifespan L70 B50 @25°C (Hrs)	30000
------------------------------	-------

421061

## Technical Specification

### Emergency Data

Battery Type	LiFeP04
Battery Capacity (mAh)	1500mAh
Battery Warranty (Years)	2
Recharge Time (Hours)	24 Hours
Emergency Type	Maintained/Non-Maintained
Test Procedure	Manual
Emergency Duration (Hours)	3
Emergency Output	140

### Physical Data

Housing colour	White RAL 9003
Body material	Polycarbonate
IP Rating	65
Diffuser Material	Polycarbonate
Nominal Product Length (mm)	350
Nominal Product Width (mm)	110
Nominal Product Height (mm)	60
Weight (kg)	0.9

### Standards and Approvals

Manufactured In Accordance To	EN 60598-1 EN60598-2-22
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on Request
Accredited Members	LIA, ISO9001

421061

Technical Specification

