


## Emergency

### Woodhead Emergency Downlight 3W 6000K Open Area Self Test - White



- LiFePO4 battery • Recessed installation

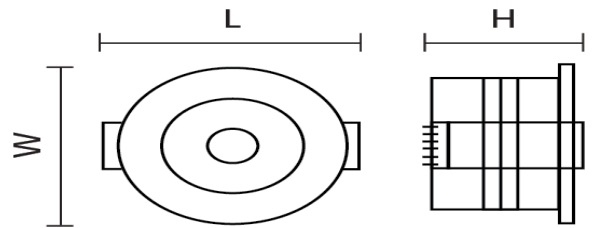

### General Data

<b>Technology</b>	LED
<b>Mounting options</b>	Ceiling
<b>Install Options</b>	35mm Cut Out
<b>Electrical Connector Type</b>	Flying Lead
<b>Input Electrical Connection</b>	Neutral P Live
<b>General Application</b>	Commercial   Industrial   Educational
<b>Operating Temperature Range °C</b>	0 - +30
<b>Warranty (Years)</b>	5

421308

Technical Specification

### Optical Data

<b>LED Manufacturer / Type</b>	Everlight
<b>Fixture Luminous Flux (Lm)</b>	152
<b>Luminaire Efficacy @6000K (lm/W)</b>	152
<b>LOR %</b>	100
<b>Beam Angle°</b>	110
<b>Photobiological Risk Group</b>	RG0

### Light Source Data

<b>Colour Temperature (K)</b>	6000
<b>Light Colour</b>	Daylight
<b>CRI Ra</b>	70

### Electrical Data

<b>Wattage (W)</b>	3
<b>Total Power Consumption (W)</b>	3
<b>Mains voltage (V)</b>	220 - 240
<b>Lamp power factor</b>	0.8
<b>Electrical protection</b>	Class II
<b>Driver Output (V)</b>	3.2
<b>Control Gear Type CC or CV</b>	Constant Current
<b>Dimmable</b>	No
<b>Driver Brand</b>	Luminaireux
<b>Nominal Frequency (Hz)</b>	50/60

### Lifetime Data

<b>Lifespan L70 B50 @25°C (Hrs)</b>	30000
-------------------------------------	-------

421308

Technical Specification

## Emergency Data

<b>Battery Type</b>	LiFeP04
<b>Battery Capacity (mAh)</b>	1500
<b>Battery Warranty (Years)</b>	2
<b>Recharge Time (Hours)</b>	24 Hours
<b>Emergency Type</b>	Non-Maintained
<b>Test Procedure</b>	Self Test
<b>Emergency Duration (Hours)</b>	3
<b>Emergency Output</b>	152

## Physical Data

<b>Housing colour</b>	White RAL 9016
<b>Body material</b>	Aluminium
<b>IP Rating</b>	20
<b>IK Rating</b>	7
<b>Diffuser Material</b>	Polycarbonate
<b>Diffuser finish</b>	Polycarbonate
<b>Nominal Product Length (mm)</b>	40 Downlight, 150 Driver, 142 Battery
<b>Nominal Product Width (mm)</b>	40 Downlight, 30 Driver, 85 Battery
<b>Nominal Product Height (mm)</b>	21 Downlight, 29 Driver, 27 Battery
<b>Cut-Out (mm)</b>	35
<b>Weight (kg)</b>	0.19

## Standards and Approvals

<b>Manufactured In Accordance To</b>	EN 60598-1 EN60598-2-22
<b>CE Mark</b>	Yes
<b>UKCA Mark</b>	Yes
<b>WEEE Symbol</b>	Yes
<b>Certificate Of Conformity</b>	Available on Request
<b>Accredited Members</b>	LIA, ISO9001

421308

Technical Specification

