


## Exterior

### Lifford Floodlight AC 20W 4000K - Black



- Diecast aluminium body
- Angled bracket for ease of installation
- Supplied with 1M prewired H05RN-F cable
- Breather valve to prevent condensation

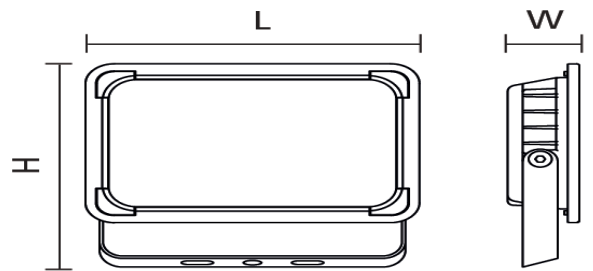

## General Data

<b>Technology</b>	LED
<b>Mounting options</b>	Wall
<b>Install Options</b>	Bracket
<b>Electrical Connector Type</b>	Flying Lead
<b>Input Cable</b>	1M H05RN-F 3-Core
<b>Input Electrical Connection</b>	Live   Neutral   Earth
<b>General Application</b>	Residential   Commercial   Industrial
<b>Operating Temperature Range °C</b>	-20 - +30
<b>Warranty (Years)</b>	3

430018

Technical Specification

### Optical Data

LED Manufacturer / Type	Liangan
Fixture Luminous Flux (Lm)	2128
Luminaire Efficacy @4000K (lm/W)	100
LOR %	100
Colour Selectable	No
Beam Angle°	110
Photobiological Risk Group	RG0

### Light Source Data

Energy Class	F
Lm/W	100
Colour Temperature (K)	4000
Light Colour	Cool White
CRI Ra	80

### Electrical Data

Wattage (W)	20
Total Power Consumption (W)	21.3
Mains voltage (V)	220 - 240
Lamp power factor	0.9
Electrical protection	Class I
Driver Output (V)	DOB
Control Gear Type CC or CV	Constant Current
Dimmable	No
Driver Brand	Luminaireux
Nominal Frequency (Hz)	50/60
Surge Protection (kV)	1

### Lifetime Data

Lifespan L70 B50 @25°C (Hrs)	30000
------------------------------	-------

430018

Technical Specification

## Physical Data

Housing colour	Black RAL 9017
Body material	Diecast Aluminium
IP Rating	65
IK Rating	8
Diffuser Material	Tempered Glass
Diffuser finish	Clear
Nominal Product Length (mm)	141
Nominal Product Width (mm)	150
Nominal Product Height (mm)	29
Weight (kg)	0.36

## Standards and Approvals

Manufactured In Accordance To	EN 60598-1
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on Request
Accredited Members	LIA, ISO9001

