

# ST5500

FIVE ZONE  
LCD SECURITY PANEL



- 5 zones, 4 fully programmable
- Remote LCD keypad option
- Unique Sleep Watch keypad option
- Full guard, part guard and Sleep Watch arming
- 50-event memory with time and date
- Separate bell, speaker, strobe and SAB outputs
- Adjustable entry, exit and bell timers
- Built-in sounder
- Back-lit keypad

LY69-015-73

A 4 zone 32 digit LCD control panel, ideal for most small installations. Gives the maximum user information, making installation, programming and daily use much easier. The ST5500 is fully compatible with the remote LCD and Sleep Watch keypads to complete the full range of panels.

### Product Specification

#### Keypad Options:

Onboard 15 key rubber keypad with 32 digit LCD display  
LCD (K6550) and Sleep Watch (SL6600) options

#### Programmable Timers:

Fully programmable entry, exit and Sleep Watch  
1-255 seconds activation time

#### Outputs:



1 Auxiliary 13.5V dc 250mA  
1 Self Actuating Bell  
Bell output 12V dc latched reset  
Strobe 12V continuous until reset

#### Electrical:

Mains supply 220-240V ac

#### Physical:

Dimensions (HxLxW) 230 x 160 x 65mm  
Weight 1.25 Kg

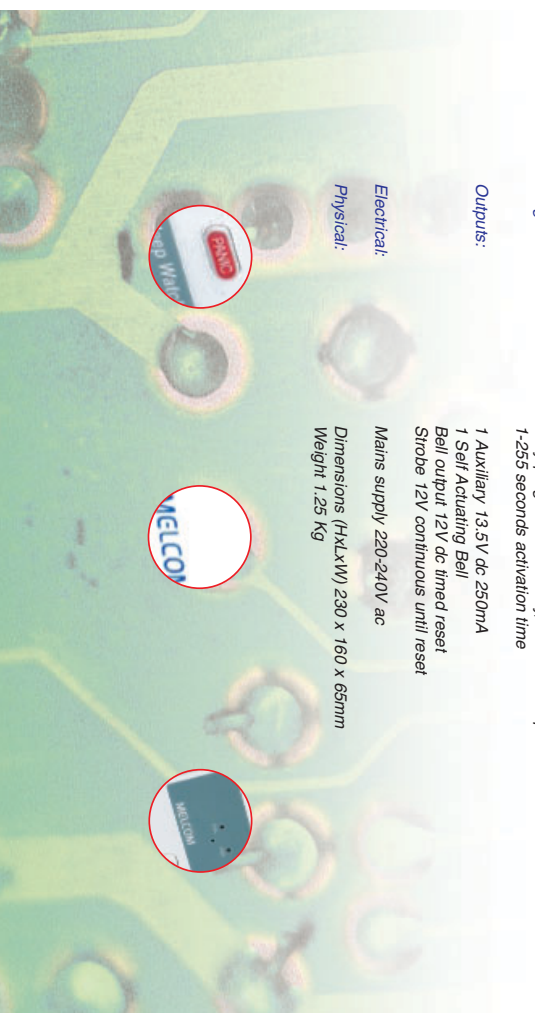

# Accessories

## K6600 Remote LCD Keypad LY69-023-73



32 digit LCD Display  
On board Panic Button  
Up to 6 Keypads per ST6100 / ST6600  
Built-in Piezo Sounder  
Status LED Indication

**Specifications**  
Operating voltage: 12V dc  
Current consumption: 80mA  
Wiring: 6 core cable  
Dimensions: 135 x 108 x 32 mm  
Housing: ABS Plastic  
Weight: 0.2 Kg

## K6550 Remote LED Keypad LY69-042-76



LED Display  
On board Panic Button  
Up to 6 Keypads per ST6100 / ST6600  
Built-in Piezo Sounder  
Status LED Indication

**Specifications**  
Operating voltage: 12V dc  
Current consumption: 17mA  
Wiring: 6 core cable  
Dimensions: 135 x 108 x 32 mm  
Housing: ABS Plastic  
Weight: 0.2 Kg

## SL6600 Remote Sleep Watch Keypad LY69-024-74



Unique Sleep Watch function  
Integrated Panic Button  
Up to 6 Keypads per system  
Built-in Piezo Sounder  
Status LED Indication  
Flush or surface mount

**Specifications**  
Operating voltage: 12V dc  
Current consumption: 17mA  
Wiring: 6 core cable  
Dimensions: 110 x 72 x 24 mm  
Housing: ABS Plastic  
Weight: 0.2 Kg

## AD1000 Telephone Voice Dialler LY69-049-83



8 Telephone numbers  
20 second voice message  
Recall programmed telephone numbers  
Performs tone, pulse and PABX dialling  
Detects answered or busy numbers

**Specifications**  
Operating voltage: 12V dc  
Current consumption: 20mA  
Dimensions: 135 x 108 x 32 mm  
Housing: ABS Plastic  
Weight: 0.2Kg

## Micron Plus PIR LY69-000-66



Pyroelectric dual element sensor  
Selectable pulse account  
Ultra High R.F.I. Immunity  
Universal mounting bracket  
Attractive appearance


**Specifications**  
Operating Voltage: 9 - 15V dc  
Current consumption: 17mA  
Mounting height: 2m  
Coverage: 90 degrees  
Range: 10 - 12m  
Dimensions: 98 x 68 x 43mm

Churchill Way, Nelson, Lancashire, BB9 6BT. email:sales@lynteck.co.uk  
www.lynteck.co.uk Tel: 01282 717 460 Fax: 01282 698 020  
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)  
Company policy is one of continuous improvement  
we reserve the right to change specification without prior notice.



**A FULLY INTEGRATED SECURITY SOLUTION**  
Intruder Alarms & Accessories





# ST6100

EIGHT ZONE  
INTRUDER ALARM PANEL



LY69-022-72

- 8 zones, 7 fully programmable
- Choose LCD or LED keypad option
- Unique Sleep Watch keypad option
- Full guard, part guard and Sleep Watch arming
- 50-event non-volatile memory
- Separate bell, speaker, strobe and 2 SAB outputs
- Programmable entry, exit and siren timers
- Built-in sounder
- Back-lit keypad

A professional alarm panel with 7 programmable zones and 1 dedicated 24 hour tamper zone. The ST6100 can be used with a 32 digit LCD keypad, an LED keypad and the unique Sleep Watch keypad. Up to 6 LCD or LED keypads can be used and the panel offers a 50 event memory with time and date (LCD keypad only).

# ST6550

EIGHT ZONE INTRUDER ALARM  
PANEL WITH REMOTE KEYPAD



LY69-027-77

- 8 zones, 7 fully programmable
- Choose LCD or LED keypad option
- Unique Sleep Watch keypad option
- Full guard, part guard and Sleep Watch arming
- 50-event non-volatile memory
- Audible walk-test on all zones
- Programmable entry, exit and siren timers
- Built-in sounder in keypads
- Programmable service timer

A polycarbonate 8 zone security panel which can be purchased with the LCD keypad option or the LED keypad. The panel can be installed discreetly with only the stylish remote keypad on display. The unique Sleep Watch keypad is a further option. Easy to install, the ST6550 is a versatile intruder alarm solution.

# ST6600

EIGHT ZONE STEEL  
PANEL WITH REMOTE KEYPAD



LY69-025-75

- 8 zones, 7 fully programmable
- Choose LCD or LED keypad option
- Unique Sleep Watch keypad option
- Full guard, part guard and Sleep Watch arming
- 50-event non-volatile memory
- Audible walk-test on all zones
- Programmable entry, exit and siren timers
- Mains failure, low battery and omitted zones indication
- Programmable service timer

A metal 8 zone security panel which can be purchased with the LCD keypad option or the LED keypad. The added security of a metal panel with only the stylish remote keypad on display. The unique Sleep Watch keypad is a further option. Easy to install, the ST6600 is a versatile, secure intruder alarm solution.

### Product Specification

#### Keypad Options:

Onboard 15 key rubber keypad with personal alarm LCD (K6600), LED (K6550) and Sleep Watch (SL6600) options.

#### Programmable Timers:

Fully programmable entry, exit and Sleep Watch 1-255 seconds activation time

#### Outputs:

2 Auxiliary 13.5V dc 250mA  
Bell output 12V dc timed reset  
Speaker rated at 10hm  
Strobe 12V continuous until reset

#### Electrical:

Mains supply 220-240V ac

#### Physical:

Dimensions (HxLxW) 260 x 220 x 85mm  
Weight 1.8Kg



### Product Specification

#### Keypad Options:

LCD (K6600), LED (K6550) and Sleep Watch (SL6600) options

#### Programmable Timers:

Fully programmable entry, exit and Sleep Watch 1-255 seconds activation time

#### Outputs:

2 Auxiliary 13.5V dc 250mA  
Bell output 12V dc timed reset  
Speaker rated at 10hm  
Strobe 12V continuous until reset

#### Electrical:

Mains supply 220-240V ac

#### Physical:

Dimensions (HxLxW) 260 x 220 x 85mm  
Weight 1 Kg



### Product Specification

#### Keypad Options:

LCD (K6600), LED (K6550) and Sleep Watch (SL6600) options

#### Programmable Timers:

Fully programmable entry, exit and Sleep Watch 1-255 seconds activation time

#### Outputs:

2 Auxiliary 13.5V dc 250mA  
Bell output 12V dc timed reset  
Speaker rated at 10hm  
Strobe 12V dc continuous until reset

#### Electrical:

Mains supply 220-240V ac

#### Physical:

Dimensions (H x L x W) 280 x 220 x 85mm  
Weight 2.25Kg

