

NEW
MODEL

Silent Fan Conceal Range

Domestic Range

CSF100



The Manrose Silent Fan Conceal offers a low sound level of only 16dB(A), comes with a tile like front cover and is now available as a humidistat model.

Designed for wall and panel mounting, this attractive fan is ideal for bathrooms and toilets.

The unit also comes complete with a performance enhancing turning vane system located in the spigot to improve performance by maintaining a high output.

- Select from 2 speeds - 15 l/s or 21 l/s
- High quality, long life motors continuously rated and warranted for a minimum of 30,000 hours or 3 years
- Decibel Level of ONLY 16dB(A) at 3m
- An impressive extraction rate of 75m³/hr, 21 litres per second on high speed
- Low energy motor with a maximum consumption of 7 Watts
- Complete with integral backdraught shutters
- Available in Standard, Timer and NEW Humidity controlled version with fixed over run




Technical Details

Cat. No. Product type

CSF100S	Silent Conceal 100 Standard
CSF100T	Silent Conceal 100 Timer
CSF100HT	NEW Humidity model with fully adjustable humidity sensor & integral fixed electronic timer

Dimensions (mm)

A	B	C	D	EØ
159	121	38	80	99

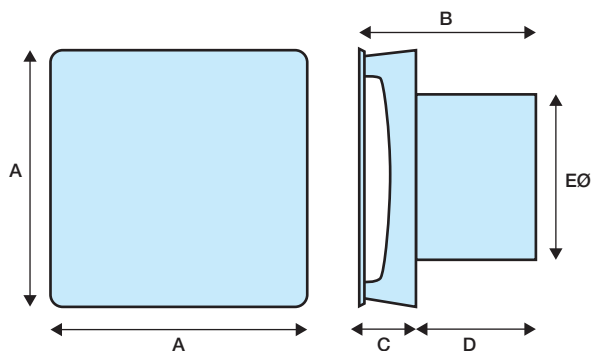

Performance Graph

Cat. No.	Extract rate l/s	Sound dB(A)
CSF100 - Low speed	15	16
CSF100 - High speed	21	29

Electrical

220-240V - AC. 50Hz Single Phase consuming 7 watts. These fans are double insulated and do not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, having a contact separation of at least 3mm in all poles, must be used with a 3 amp fuse fitted. The fan must not be accessible to a person using either the shower or bath and mounted a minimum of 1.8 metres from the floor.

Additional Data

Maximum Pressure: 20 p.a.
 Fan Speed: 2300 r.p.m.
 Sound Volume: 16 / 29 dB(A)
 Maximum Operating Temperature: 40°C