

INCEPTOR® SLATE

Technical Specification





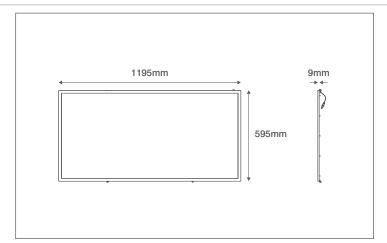

General Information


Dimensions	1195mm x 595mm x 9mm
Materials	Frame: Powdercoated Aluminium
	Diffuser: Polycarbonate
	Light Guide Plate (LGP): PMMA
Finish	White (RAL 9003)
Product Weight	5.1Kg
Dimmable	No
Ingress Protection	IP44
Flammability Rating	TP(a)
Warranty	5 Years

Supply & Power

117	
Input Voltage & Frequency	220-240V~ 50/60Hz
Electrical Safety	Class II (Double Insulated)
Input Power	50W
Input Current	221mA
In-rush Current	14A (580µs)
Power Factor	>0.9
Ambient Temperature (Ta)	-20°C - +40°C
Critical Temperature	+75°C
 LED Driver	Remote Driver Supplied
Prewired Flow [™] Connector	Yes (3 Pole CT105-F Push-fit Terminals)

Accessories

OVEMCG50	3 Hour Emergency Pack	
OVSURF733	1200mm x 600mm Surface Frame Kit	
OVSUSP733	Suspension Wire Kit	



Luminaire Output

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	5250lm
Efficacy	105lm/W
Beam Angle	90°
Unified Glare Rating (UGR)	<19
LED Lifetime (L70)	30,000 Hours
Flicker Free	Yes

Additional Information

Suspension hooks pre-fitted to the back

