

# PRODUCT DATASHEET

## Ultra-Slim S Series

### PRODUCT DATA

Range	LED Downlights
Part Code(s)	R091605   R091616   R091606
Applications	Interior
Warranty	5 years
Certification(s)	CE, RoHS

### PHYSICAL DATA



Colour Finish	White
Dimensions (mm)	H27 x L180 x W180
Luminaire Fixing	Recessed
Construction Material	Aluminium
Diffuser Type	Polystyrene - TPb rated (TPa version also available as optional)
Unit Weight	0.62Kg

### ELECTRICAL DATA

Wattage	18W
Voltage Range	AC220-240
Power Factor	>0.90
Inrush Current	<60A
Running Current	DC350mA

### PERFORMANCE DATA

Colour Temperature	3000K   5000K   6000K
Lumens (±5%)	1645
Efficacy	~91Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	90°
Operating Hours	>50000
CRI	>80Ra
IP Rating	IP54
IK Rating	IK09
Dimming	Mains dimmable as standard Other options available
Emergency	Emergency Pack available R10-03E(SM)

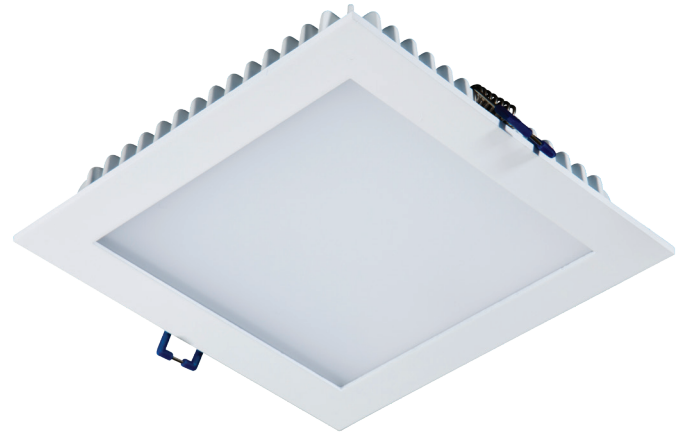

Hole size: 160mm x 160mm