
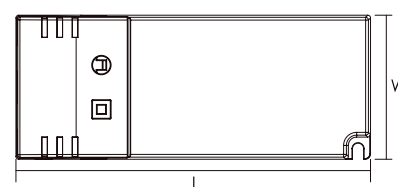


Constant Voltage TRIAC Dimming LED Driver

Features:

- Dimmable with leading edge or trailing edge dimmer
- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Smooth dimmable compatible with most dimmer
- Dimming range 1...100%

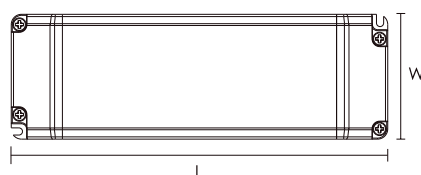

Parameters:

| Model No. | Input voltage (V) | Max. output (W) | Output voltage (V) | Output current (A) | Min. load (W) | Power factor (λ) | Efficiency full load (%) | No-load power (W) | Ambient temperature ta (°C) | Max. casing temperature tc (°C) | Isolaton | Dimensions LxWxH (mm) | Weight (g) |
|-----------|-------------------|-----------------|--------------------|--------------------|---------------|------------------|--------------------------|-------------------|-----------------------------|---------------------------------|----------|-----------------------|------------|
| 79332 | 220-240 | 25 | 24 | 0.1-1.04 | 2.4 | 0.95 | 85 | <1.0 | -20...+50 | 70 | SELV | 128x52x30 | 110 |
| 79333 | 220-240 | 50 | 24 | 0.5-2.08 | 12 | 0.95 | 86 | <1.0 | -20...+50 | 70 | SELV | 184x61x32 | 240 |
| 79334 | 220-240 | 100 | 24 | 1.4-4.2 | 33.6 | 0.95 | 91 | <1.0 | -20...+45 | 80 | SELV | 210x67x34 | 360 |