



13A UK Socket Outlets



Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to the Metal Clad range of products.

All Metal Clad 13A Sockets are tested and approved to BS1363 offering assured quality and safety through our BSI Kitemark Licence KM10807.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362 Website: www.scolmore.com



13A UK Socket Outlets

Product Range	
13A UK Socket Outlets	
CL035	13A 1 Gang DP Switched Socket Outlet
CL036	13A 2 Gang DP Switched Socket Outlet (Twin Earth)

13A UK Socket Outlets (No Knockouts In Back Box)	
CL035B	13A 1 Gang DP Switched Socket Outlet
CL036B	13A 2 Gang DP Switched Socket Outlet (Twin Earth)








Facsimile: 01827 63362

Website: www.scolmore.com




13A UK Socket Outlets

Product Dimensional Drawings (mm)

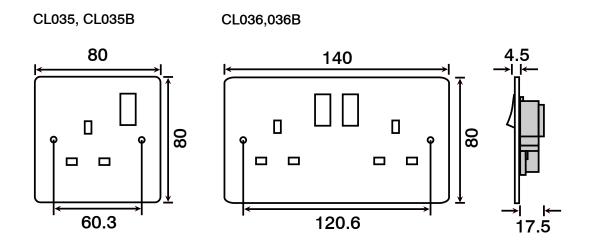

Product Wiring Diagram

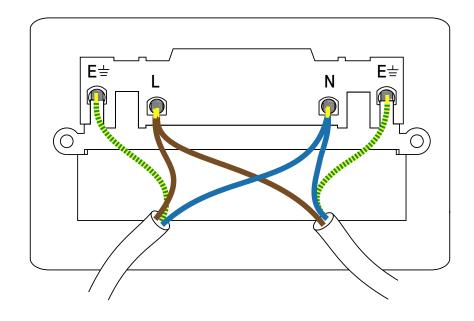

Errors & Omissions excluded. Specification is subject to change without notice.

Telephone: 01827 63454

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

E-mail: sales@scolmore.com, technical@scolmore.com

Website: www.scolmore.com

Facsimile: 01827 63362



13A UK Socket Outlets

Technical Specification	
13A UK Socket Outlets	
Material Composition	Front Plate & Back Box: Electrophoretically Coated Steel
	Rocker Switch & Rear Housing: Urea
	Terminals: Brass
	Earth Strap: Mild Steel
	Terminal Screws: Steel & Yellow Passivated
	Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	2.5Nm
Cable Size	4 x 2.5mm ²
Back Box Depth	40mm Supplied
Knockout Size	20mm
Double Pole	Yes
Twin Earth	(CL036)
Warranty	10 Years
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BSI Kitemark Aproved (Licence KM10807)
	BS 1363-2:1995+A4:2012

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB





Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454 f: 01827 63362

e: sales@scolmore.com

w: www.scolmore.com

DECLARATION OF CONFORMITY

1. Issuer Name Scolmore International Limited

2. Issuer Address 1 Scolmore Park, Landsberg,

> Lichfield Road Industrial Estate. Tamworth, Staffordshire, B79 7XB

3. Object(s) of Declaration Metal Clad Range

> a. Group Socket Outlets

b. Model No. CL035, CL035B, CL036, CL036B

- 4. The object of the declaration described above is in conformity with the requirements of the following Legislations:
- 5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

BSI Kitemark Licence KM10807 BS 1363-2: 1995 + A4: 2012

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

CE15







