



10AX Plate Switches (Modular)



The Click MODE range has recently been expanded to include a range of anthracite grey finished accessories to comply with current Building Regulations Part M.

Part M switches are developed largely as a modular range based on the large selection of switch modules available in the CLICK MINIGRID Module range. Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

10AX Plate Switches (Modular)

Product Range

10AX Plate Switches (Modular)

| | |
|---------------|--------------------------------|
| CMA011 | 10AX 1 Gang 2 Way Plate Switch |
| CMA012 | 10AX 2 Gang 2 Way Plate Switch |
| CMA013 | 10AX 3 Gang 2 Way Plate Switch |



CMA011AG



CMA012AG




CMA013AG


10AX Plate Switches (Modular)

Product Dimensional Drawings (mm)



CMA011AG

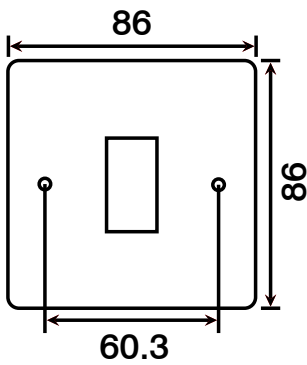

CMA012AG

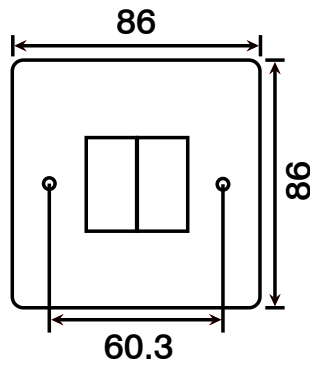


CMA013AG

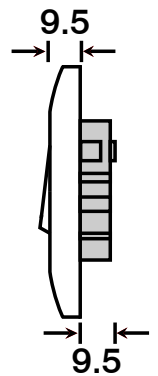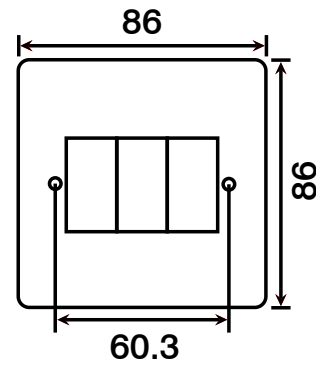


10AX Plate Switches (Modular)

Wiring Diagrams


1 Way Switched Circuit

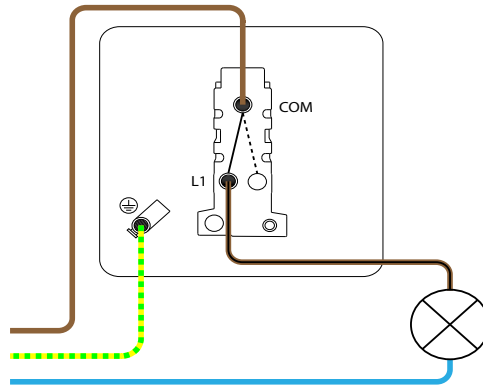

2 Way Switched Circuit

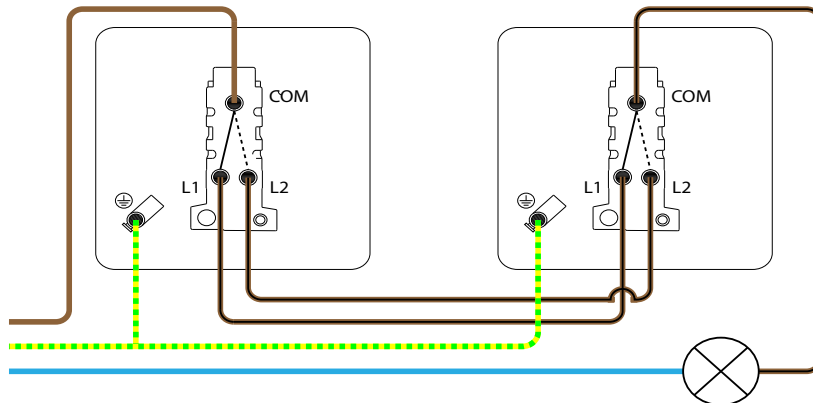

Intermediate Switched Circuit

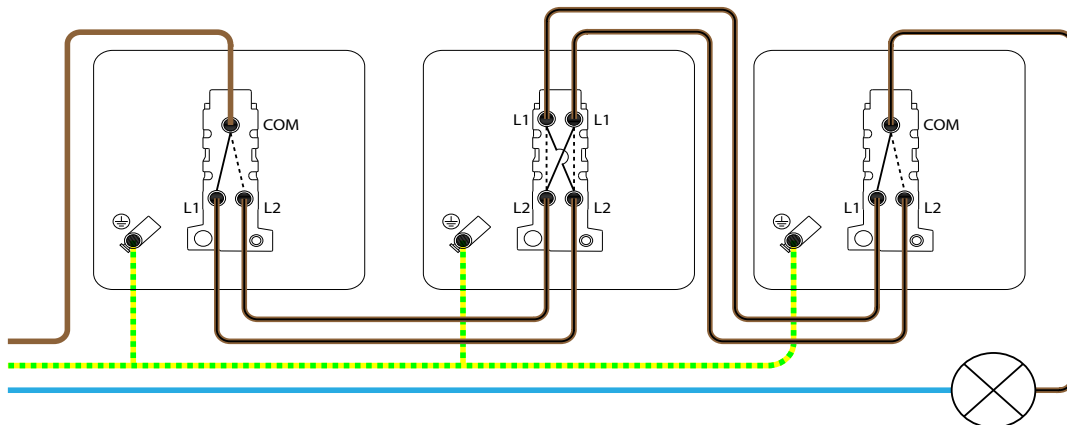

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com

10AX Plate Switches (Modular)

Technical Specification

10AX Plate Switches (Modular)

| | |
|---------------------------------|---|
| Material Composition | Front Plate & Rocker Switch: Urea Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Internal Mechanism: Formed Press Brass Silver “on-lay” Copper / Brass Contacts |
| Voltage | 240V~ 50Hz |
| Current Rating | 10AX (suitable for inductive loads) |
| Terminal Size | 3.5mm ø |
| Torque Value | 0.4Nm |
| Cable Size | 4 x 1.5mm ² or 2 x 2.5mm ² |
| Back Box Depth | 16mm - 47mm |
| Modular | Yes |
| Warranty | 20 Years |
| Anti Microbial Certified | Yes |
| LRV Value | 8.9 |
| IP Rating | IP20 |
| Operational Temperature | -5° to +40°C |
| Standards | The Low Voltage Directive 2006/95/EC, Modified ISO 22196 BS EN 60669-1:1999 + A1:2002 + A2:2008 |

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Interchangeable with switches in the MINIGRID system



Part M Range

DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Part M Range
- a. *Group* Switches
- b. *Model No.* CMA011AG, CMA012AG, CMA013AG
4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*
- | Document No | Title |
|-------------|-----------------------|
| 2006/95/EC | Low Voltage Directive |

5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

EN 60669-1:1999 + A1:2002 + A2:2008

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited



Steven Bettson BSc - Senior Technical Support Engineer

CE 15