


Technical Specification

Product Code: CMA30036

Description: 13A 2 Gang Zigbee Smart Switched Socket Outlet

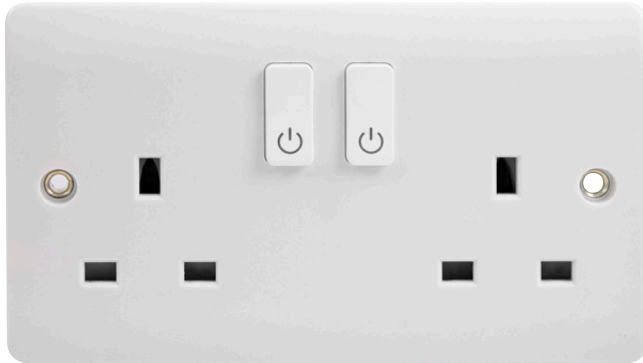

General Information

Dimensions (mm)	146 (W) x 86 (H) x 9.5 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Style	Rounded Profile	
Finish	Polar White	
Materials	Front Plate: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
Termination Type	Screw	
Terminal Size (mm)	5.7 x 4.8	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4	
Single Pole Switched	Yes	Signal Transmission Frequency 2.4GHz
3 Pin Safety Shuttered	Yes	
Twin Earth Terminals	Yes	
Protocol	Zigbee	
Open Air Wireless Range (M)	<160	
Standby Current (mA)	4	
Indicator Colour	White & Orange	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	3	
Standards	BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1	

Additional Information 3 pin safety shutter. The shutter will only open once all three plug pins are inserted.
Zigbee signal mesh
Each outlet enables manual control (unless locked), wireless control and automated control
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

Components Supplied Smart Socket Outlet, Fixing Screws, Screw Caps, Instruction Manual

Programming Information With hub and app setup and socket wired and powered, press one of the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.