


Product Code: CT2300

Description: 250V 20A 4 Pole Switch Adaptor

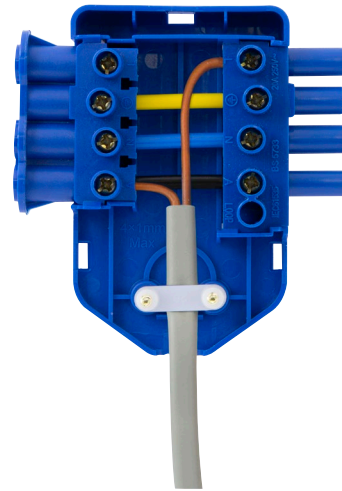

General Information

Dimensions (mm)	89 (W) x 85 (D) x 24 (H)	
Finish	Blue	
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)
	Terminals: Silver Plated Brass	Terminal Screws: Steel and Yellow Passivated
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	20	
Termination Type	Screw	Terminal Torque Value (Nm) 0.8
Terminal Size (mm)	Ø4.2	
Terminal Capacity - Solid (mm²)	3 x 2.5	
Terminal Capacity - Flex (mm²)	3 x 1.5	
Cable Restraint Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Pre-fabricating wiring systems manufactured to BS 8488 by other manufacturers may not be compatible or safely inter-connectable with this system. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Pre-wired Links 2.50mm² (Permanent Live, Earth & Neutral)