


**Product Code:** MP606CHBK

**Description:** New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Socket Outlets & Apertures

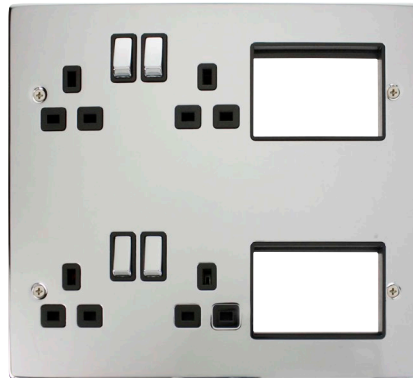

**General Information**

<b>Plate Dimensions (mm)</b>	250 (W) x 216 (H) x 8 (D)	
<b>Dimensions With Gasket (mm)</b>	254 (W) x 220 (H) x 9 (D)	
<b>New Media Aperture Dimensions (mm)</b>	75 x 50 (x2)	
<b>New Media Module Quantity</b>	Accepts Upto 2 Rows of 3 x 25mm x 50mm Modules	
<b>Style</b>	Deco	
<b>Finish</b>	Polished Chrome	
<b>Insert Colour</b>	Black	
<b>Gasket Colour</b>	Black	
<b>Materials</b>	Front Plate: Stainless Steel Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel	Insert, Rear Housing & Rocker Switch: Urea Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass
<b>Anti Microbial Certified</b>	No	
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	Ø5	<b>Terminal Torque Value (Nm)</b> 2.5
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Double Pole Switch</b>	Yes	
<b>Twin Earth Terminals</b>	Yes	
<b>Yoke Required</b>	No	
<b>Compatible Back Box (mm)</b>	MP535 (35) Or MP525 (47)	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	10	

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Requires MP525 or MP535 flush back box.  
Interchangeable with modules in the New Media Range.