



The smooth modern lines of the Deco accessory plate will fit easily into traditional and contemporary designs alike.

All Deco Round Pin sockets are tested and approved to BS546 offering assured quality and safety.

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com





Product Range

Finish Comparison



Antique Brass (AB)



Polished Brass (BR)



Polished Chrome (CH)



Satin Chrome (SC)



Satin Brass (SB)




Black Nickel (BN)



Pearl Nickel (PN)



Stainless Steel (SS)



Georgian Cast Brass (GCBR)

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362 Website: www.scolmore.com





Product Range

Round Pin Socket Outlets

VP038##** 5A Round Pin Socket Outlet

VP039##** 2A Round Pin Socket Outlet



VPSC038WH



VPBR039BK


Facsimile: 01827 63362


Website: www.scolmore.com






Wiring Diagram

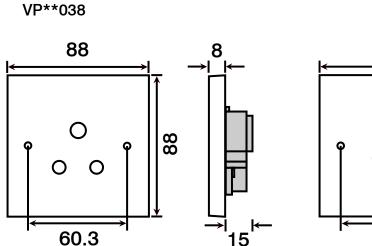




VP**039

Wiring Diagram

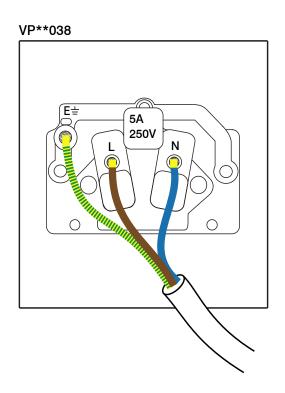

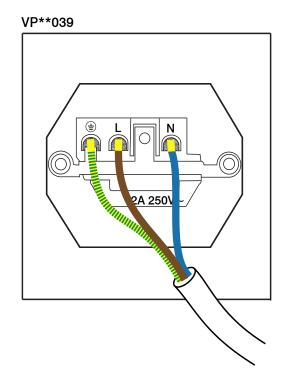

Errors & Omissions excluded. Specification is subject to change without notice. ** Denotes Plate Finish

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454 **E-mail:** sales@scolmore.com, technical@scolmore.com

Website: www.scolmore.com

Facsimile: 01827 63362





Technical Specification	
Round Pin Socket Outlets	
Material Composition	Front Plate: Stainless Steel
	Rear Housing: Urea
	Terminals: Brass
	Earth Strap: Mild Steel
	Terminal Screws: Steel & Yellow Passivated
	Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	5A / 2A
Terminal Size	5mm ø
Torque Value	1.2Nm (5A) / 0.4Nm (2A)
Cable Size	2 x 2.5mm ^{2.} / 3 x 1.5mm ²
Back Box Depth	25mm - 47mm
Warranty	20 Years
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC
	BS 546:1950

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Facsimile: 01827 63362

Website: www.scolmore.com

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454
E-mail: sales@scolmore.com, technical@scolmore.com





DECLARATION OF CONFORMITY

Scolmore International Ltd

1 Scolmore Park: Landsberg Lichfield Road Industrial Estate Tamworth, Staffordshire B79 7XB

t: 01827 63454

f: 01827 63362

e: sales@scolmore.com

w: www.scolmore.com

2. Issuer Address 1 Scolmore Park, Landsberg,

Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB

Scolmore International Limited

3. Object(s) of Declaration Deco Range

a. Group Round Pin Socketsb. Model No. VP-038, VP-039

4. The object of the declaration described above is in conformity with the requirements of the following Legislations:

Document No Title

2006/95/EC Low Voltage Directive

5. All products contained within the aforementioned comply with the relevant standards and requirements listed below.

BS 546:1950

1. Issuer Name

6. I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

88 etts

Steven Bettson BSc - Senior Technical Support Engineer

CE13







