

## Talento 202 / 212 Din-Rail Timeswitches

### SPECIFICATION SHEET



### Talento 202 & 212

<u>PRODUCT</u>	<u>ORDER CODE</u>	<u>DIAL TYPE</u>	<u>SWITCHING CAPACITY</u>
Talento 202	Talento 202	1 X 24 HOUR 1 X 7 DAY	16AMP 16AMP
Talento 212	Talento 212	2 X 24 HOUR	16AMP


### General information:

This product is suitable for din-rail mounting.  
 Talento 202 is a twin-channel timer, with 1 x 24 hour & dial 1 x 7 day dial  
 Talento 212 is a twin-channel timer, with 2 x 24 hour dials


The Talento 202 & 212 products are quartz regulated time switch devices, with a built-in battery reserve, which will maintain accurate time in the event of mains disconnection / failure.

### Technical specification:

Dimensions	85 x 105 x 60 (6-modules)
Weight	200g
AC switching capacity:	
- resistive load	16A 250v AC
- inductive load $\cos \phi 0.6$	8A 250v AC
- incandescent lamp load	1350W
Contact type	volt-free changeover
Ambient temperature	-20°C to +55°C
Accuracy	+/- 2.5 seconds per day @ 20°C
Running reserve (quartz only)	150 hours
Minimum switching time	24 hour – 30 minutes
Manual override	Fix on / Fix off

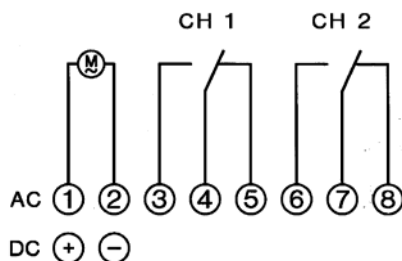

Wiring schematic

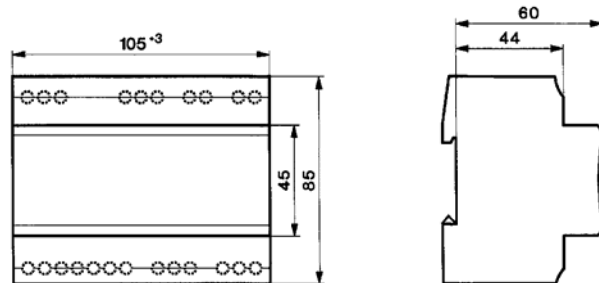

Dimensional details