


## EVSG 25

Stop end, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

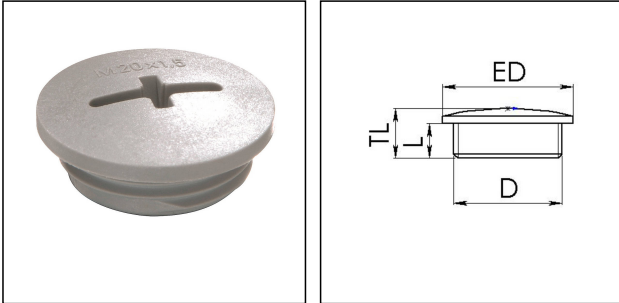

<b>Material</b>	Polyamide, fibre reinforced
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Protection class</b>	IP56
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	25
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	8 mm
<b>External diameter ED</b>	30 mm
<b>Total length TL</b>	11,5 mm
<b>Product Color</b>	RAL 7001
<b>Order no. RAL 7001</b>	10062517
<b>Type</b>	EVSG 25
<b>Packing unit</b>	100
<b>ETIM-Classification</b>	EC000032

31.10.2016

