


KRM 50/32

Reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

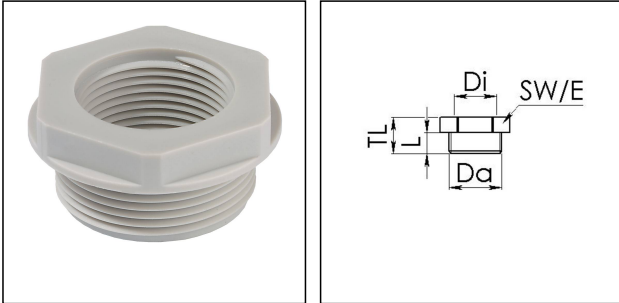

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Thread type outer	M
Ø outer thread	50
Lead outer	1,5
Length screw-in thread L	14 mm
Thread type inner	M
Ø inner thread	32
Lead inner	1,5
Total length TL	21 mm
Key width SW	55 mm
Collar diameter (E)	61 mm
Product Color	RAL 7035
Order no. RAL 7035	10063590
Type	KRM 50/32
Packing unit	5
ETIM-Classification	EC000938

31.10.2016

