


## KRM 63/50

Reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

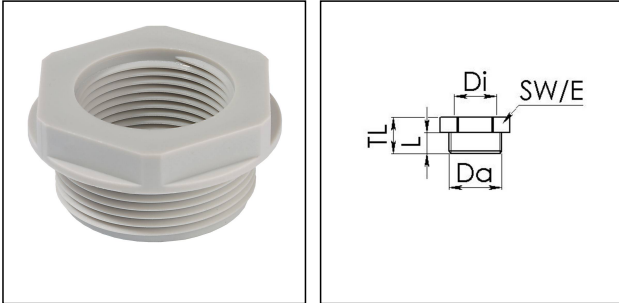

<b>Material</b>	Polyamide, fibre reinforced
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Thread type outer</b>	M
<b>Ø outer thread</b>	63
<b>Lead outer</b>	1,5
<b>Length screw-in thread L</b>	15 mm
<b>Thread type inner</b>	M
<b>Ø inner thread</b>	50
<b>Lead inner</b>	1,5
<b>Total length TL</b>	22 mm
<b>Key width SW</b>	65 mm
<b>Collar diameter (E)</b>	72 mm
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	10063594
<b>Type</b>	KRM 63/50
<b>Packing unit</b>	5
<b>ETIM-Classification</b>	EC000938

31.10.2016

