


CLIXX 16

Membrane cable entrie with strain relief



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

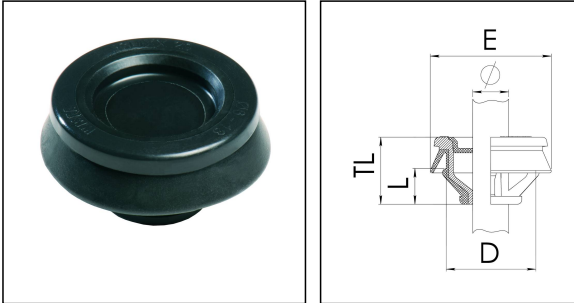

Material	Polypropylene
Material membrane	TPE
Temp. range min	-40 °C
Temp. range max	65 °C
Protection class	IP66/67
Ø Connection thread D	16
Length screw-in thread L	7,3 mm
Ø cable diameter min	4,5 mm
Ø cable diameter max	10 mm
Collar diameter (E)	23 mm
Total length TL	15 mm
Ø Drilling	16,7 mm
Wall thickness S	0,8 mm - 3,5 mm
Product Color	RAL 9005
Order no. RAL 9005	10101930
Type	CLIXX 16
Packing unit	50
ETIM-Classification	EC000451

31.10.2016

