


## CLIXX 16

Membrane cable entrie with strain relief



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

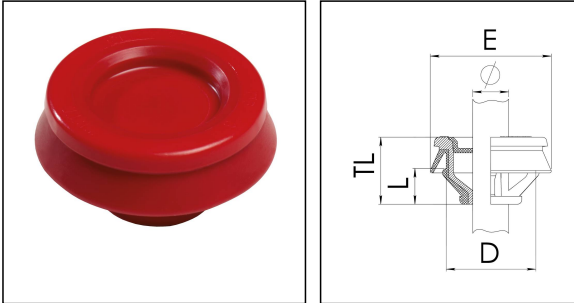

<b>Material</b>	Polypropylene
<b>Material membrane</b>	TPE
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	65 °C
<b>Protection class</b>	IP66/67
<b>Ø Connection thread D</b>	16
<b>Length screw-in thread L</b>	7,3 mm
<b>Ø cable diameter min</b>	4,5 mm
<b>Ø cable diameter max</b>	10 mm
<b>Collar diameter (E)</b>	23 mm
<b>Total length TL</b>	15 mm
<b>Ø Drilling</b>	16,7 mm
<b>Wall thickness S</b>	0,8 mm - 3,5 mm
<b>Product Color</b>	RAL 3000
<b>Order no. RAL 3000</b>	10101931
<b>Type</b>	CLIXX 16
<b>Packing unit</b>	50
<b>ETIM-Classification</b>	EC000451

31.10.2016

