# AOCTO/IC/200

OCTO Indoor Controller 200W

# Features

Bluetooth enabled internal smart controller for use with the OCTO Casambi eco-system suitable for commercial and industrial applications

Push-fit loop-in, loop-out terminals for ease and speed of installation

Screw-less design

Compatible with all other bluetooth OCTO Casambi devices as part of the OCTO Casambi ecosystem

Intuitive fast operation from a smart lighting App

Future proofed free software and firmware updates

Can be used to control a group, sub groups or individual luminaires

Settings easily commissioned by a smart device

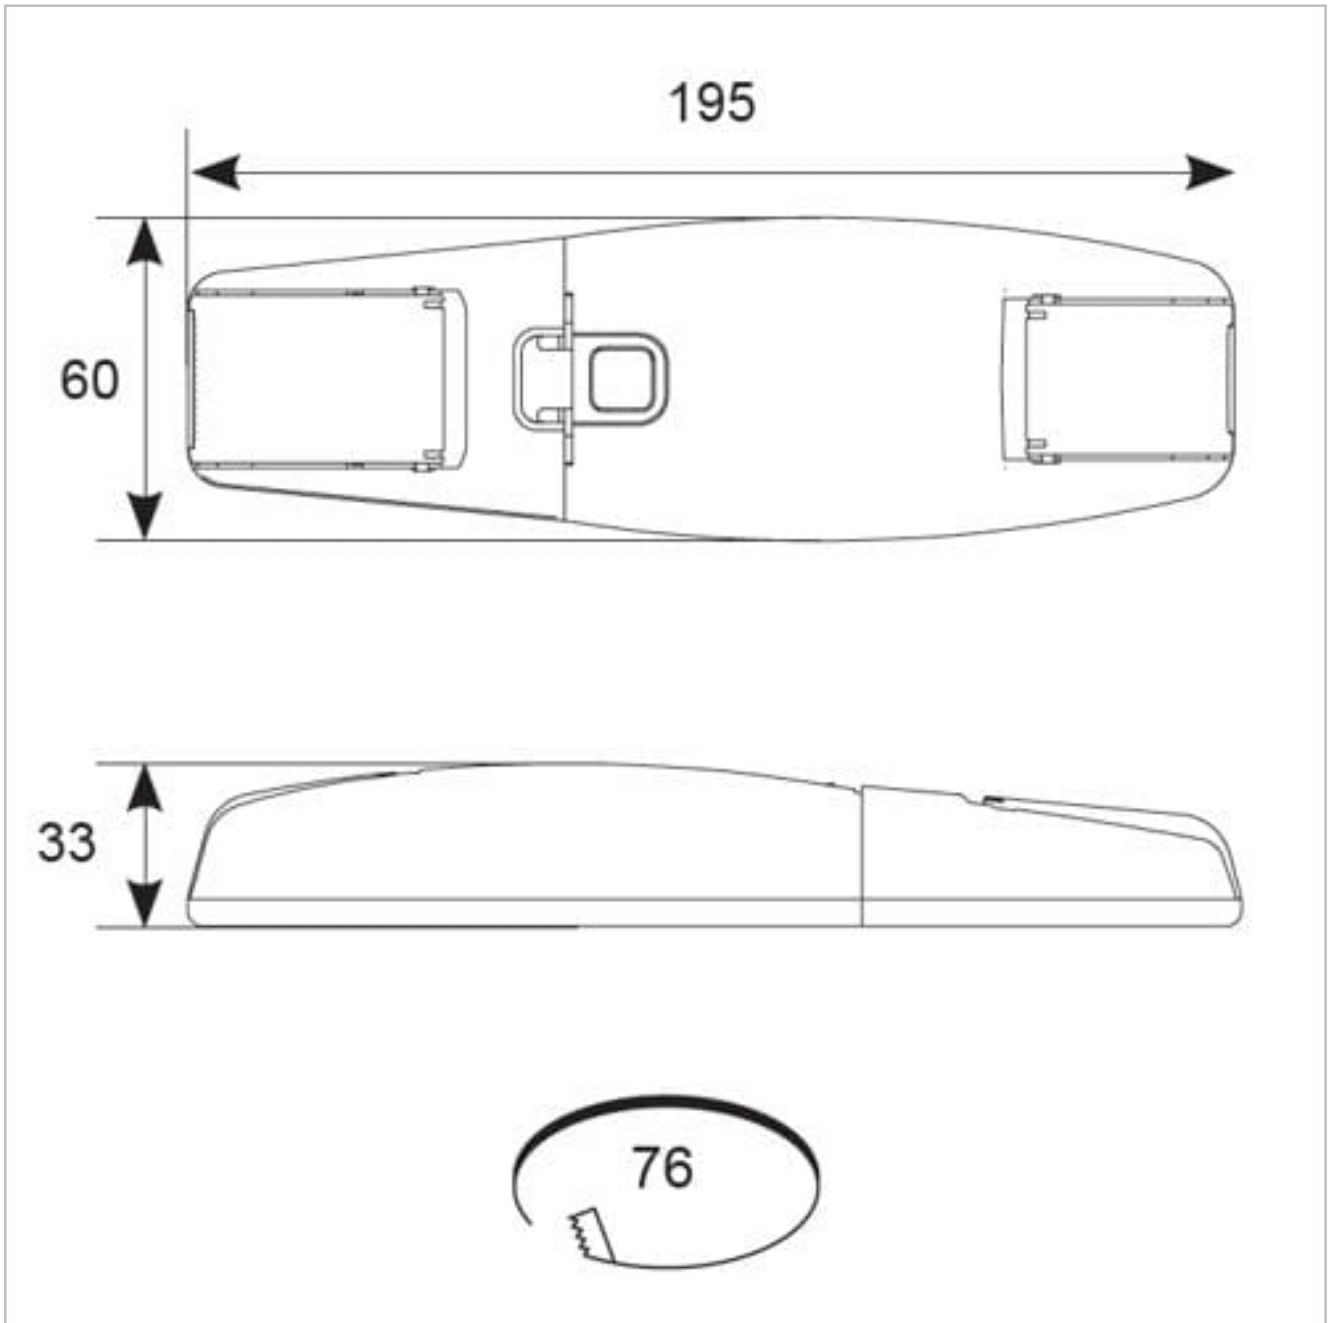App commissioning includes full control, dimming, scene setting and pre-set timer

Bluetooth wireless mesh ensures reliable and fast operation. Range between devices:15m internal, 30m external**

# General Information

| | |
|---|---|
| **Colour / Finish** | White / Grey |
| **Bluetooth Enabled** | Yes |
| **IP Rating** | IP20 |
| **Class Protection** | 1 |
| **Internal / External** | Internal |
| **Surface / Recessed / Suspended** | Surface |
| **Warranty (Years)** | 5 |
| **CE Mark** | Yes |
| **Length (mm)** | 195 mm |
| **Width (mm)** | 60 mm |
| **Height (mm)** | 33 mm |

# Technical Information

| | |
|---|---|
| **Wattage** | 200W |
| **Input** | 220/240V |
| **Hertz** | 50/60Hz |

Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:26:59 AM