



## Dual Voltage Shaver Socket



The smooth modern lines of the Deco accessory plate will fit easily into traditional and contemporary designs alike.

Deco Dual Voltage Shaver Sockets are designed to fit effortlessly with the range, with simple installation to enhance the décor of any area.

## Dual Voltage Shaver Socket

### Product Range

### Finish Comparison



Antique Brass (AB)



Polished Brass (BR)



Polished Chrome (CH)



Satin Chrome (SC)



Satin Brass (SB)



Black Nickel (BN)



Pearl Nickel (PN)



Stainless Steel (SS)



Georgian Cast Brass (GCBR)

V1.0

## Dual Voltage Shaver Socket

### Product Range

#### Dual Voltage Shaver Socket (230V/115V)


VP\*\*100##

Dual Voltage Shaver Socket



VPSS100BK

### Product Wiring and Dimensional Drawings (mm)

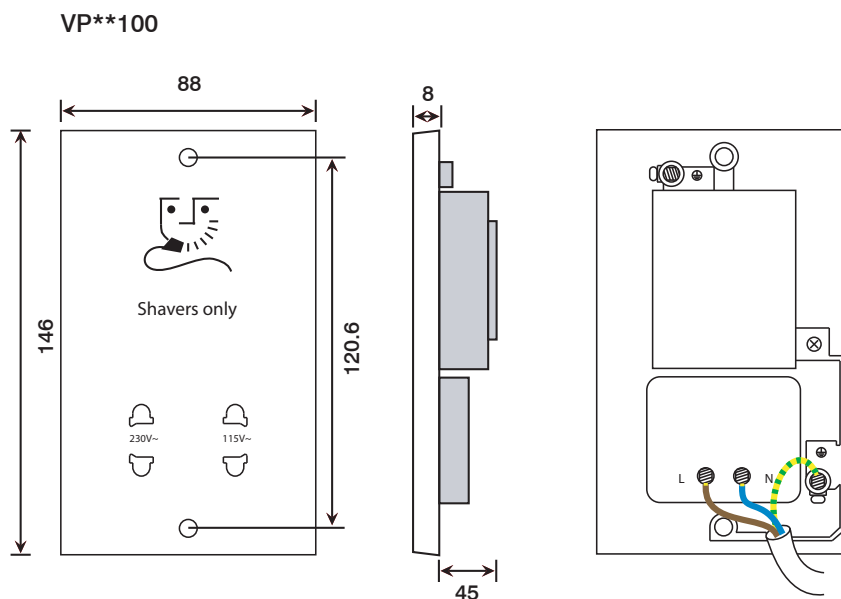

Errors & Omissions excluded. Specification is subject to change without notice. \*\* Denotes Plate Finish, ## Insert Colour

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com

## Dual Voltage Shaver Socket

### Technical Specification

#### Dual Voltage Shaver Socket (230V/115V)

<b>Material Composition</b>	Front Plate: Stainless Steel
	Rear Housing: Urea & Nylon
	Terminals: Brass
	Earth Strap: Mild Steel
	Terminal Screws: Steel & Yellow Passivated
	Silver “on-lay” Copper / Brass Contacts
<b>Voltage</b>	240V~ 50Hz
<b>Current Rating</b>	20VA at 230V or 115V
<b>Terminal Size</b>	3.5mm ø
<b>Torque Value</b>	0.4Nm
<b>Cable Size</b>	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
<b>Back Box Depth</b>	47mm
<b>Twin Earth</b>	Yes
<b>Warranty</b>	10 Years
<b>IP Rating</b>	IP21
<b>Features</b>	Safety Interlock Shutter
<b>Operational Temperature</b>	-5° to +40°C
<b>Standards</b>	The Low Voltage Directive 2006/95/EC
	BS EN 61558-2-5:1998 + A11:2004
	IEC 60884-1
	BS 546 (Socket Outlet Part)

### Additional Information

This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,  
Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Deco Range
- a. *Group* Shaver Socket Outlet
- b. *Model No.* VP-100

4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*

Document No	Title
2006/95/EC	Low Voltage Directive

5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

BS EN 61558-1:1997 + A1:1998 + A11:2003  
IEC 60884-1  
BS 546 (Socket Outlet)

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

*In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008*

Signed, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

**CE 15**