



Technical Data

Replacement Dimmer Module

Brief product description:

This replacement dimmer module offers a suitable replacement and simple way to upgrade existing dimmer switches. Compatible with BG 800 Series, 900 Series, Nexus Metal, Screwed Flatplate and Screwless Flatplate ranges.

Features:

- Intelligent trailing edge dimmer module
- Adjust the lighting level to suit the mood and save power at lower lighting levels
- Soft start brings the lights to a set level in around 1 second and extends the life of lamps
- Smooth dimming control with silent operation - no noise when dimming
- Overload protection prevents failure if you mistakenly connect your dimmer to too many lights or transformers, and will turn the lights down or off until the load is corrected
- Support for lower wattage lamps eliminates flicker
- 2 way push on/off with rotary control
- Suitable for for LED, Halogen, CFL and Incandescent lamps
- Captive backed out terminal screws for fast installation

Product Images



DMTR


Technical Specifications

Standard(s)	BS EN 60669-2-1	
Voltage	200-250V AC	
Load Rating (Max/Min per module)		
Dimmable LED	5-100W	
Tungsten/Incandescent	5-200W	
Halogen	20-200W	
Dimmable Compact Fluorescent (CFL)	5-100W	
Type	Trailing Edge	
Terminal Capacity	4 x 1mm ² 4 x 1.5mm ² 2 x 2.5mm ² & 1 x 4.0mm ²	
RoHS Directive	Yes	
WEEE Directive	Yes	
Mounting Box Depth (Min)	25mm	



Replacement Dimmer Module

Line Diagrams

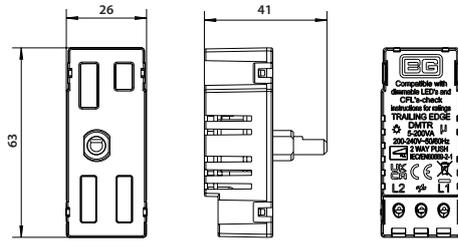

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
DMTR	2-Way 200W Trailing Edge	Bag	Colour Box	Carton	1	20	200	5050765227032	5050765227049	5050765227056

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm			Weight (kg)			CBM (m ³)
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
DMTR	2-Way 200W Trailing Edge	6.3 x 2.6 x 4.1	9.3 x 14.2 x 16.7	17.6 x 29.3 x 48.5	0.32	0.7	7.36	0.02501