

## TEMPUS IP65 TWINSPOT

### Product Features


- Non-Maintained IP rated emergency twinspace
- Polycarbonate body with aluminium heads
- Adjustable heads to ensure coverage area
- Ideal for high ceiling applications



| CAT NO.    | TYPE           | LUMINAIRE LUMENS | WATTAGE |
|------------|----------------|------------------|---------|
| LEMIPTWNM3 | Non-Maintained | 480              | 7W      |
| LEMIPTWEST | Self-Test      | 480              | 7W      |

### Product Drawing

|  | HEIGHT | AXIAL DISTANCE FROM WALL | AXIAL SPACING | TRANSVERSE SPACING | TRANSVERSE SPACING FROM WALL |
|--|--------|--------------------------|---------------|--------------------|------------------------------|
| OPEN AREA - 0.5 LUX                      | 2.5    | 2                        | 8             | 8                  | 2                            |
|  | 3      | 2                        | 9             | 9                  | 2                            |
|  | 4      | 2                        | 10            | 10                 | 2                            |
| ESCAPE ROUTE - 1 LUX (Based on 2m width) | 2.5    | -                        | -             | 8.5                | 2                            |
|  | 3      | -                        | -             | 8.8                | 2                            |
|  | 4      | -                        | -             | 9.2                | 2                            |

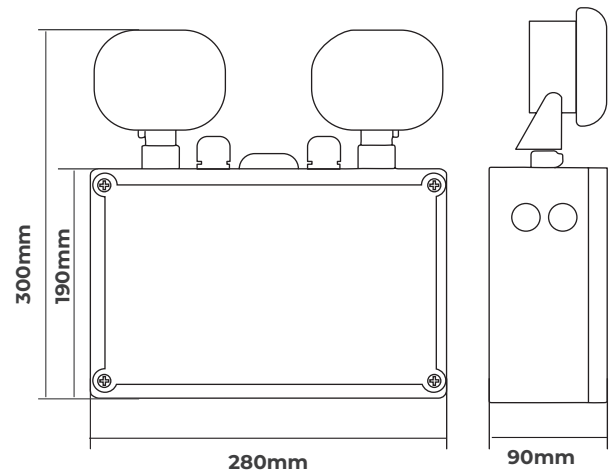

| CAT NO.    | WEIGHT (kg) | CRI | FREQUENCY (Hz) | IK RATING | BATTERY TYPE | BATTERY CAPACITY | TEMP RANGE (°C) | AMBIENT TEMP RATED LIFE (°C) MP RANGE |
|------------|-------------|-----|----------------|-----------|--------------|------------------|-----------------|---------------------------------------|
| LEMIPTWNM3 | 1.51        | >80 | 50-60          | IK04      | Ni-Cd 6V     | 2800mAh          | 0 - +30         | 25                                    |

| STANDARD   | DESCRIPTION   |
|------------|---|
| 60598-1    | Luminaires – General requirements   |
| 60598-2-22 | Luminaires – Emergency  |
| 61000-3-2  | Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions                             |
| 61000-3-3  | Lamp controlgear – Part 1: General and safety requirements  |
| 61547      | Equipment for general lighting purposes – EMC immunity requirements   |
| 55015      | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |

**LUCECO**

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

