

# DATASHEET

# Hamilton®

making connections beautifully


Code: 71SPNCPB-W

Hartland | HARTLAND RANGE | Connection Units

## Product Image



## Wiring

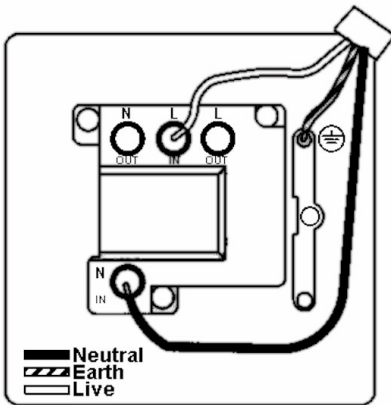


## Dimensions

**Hamilton®**

HARTLAND

SPNC

Switched Spur & Neon & Cable Outlet

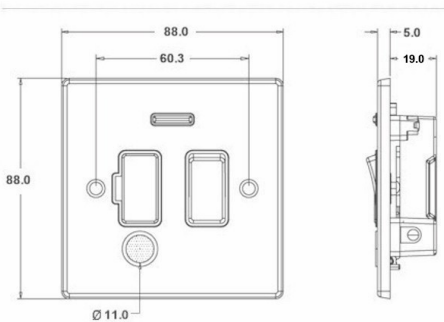

## Insert Type

1 gang 13A Double Pole Fused Spur + Neon + Cable Outlet

## Insert Colour

Polished Brass/White

## EAN13 Barcode

5017503213931

## Commodity Code

85369010

## Luckins TSI

385549846

## Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm

## Switched Poles

Double

## Current Rating

13 Amp

## Voltage

220/250V AC

## Maximum Load

13 Amp

## Mains Frequency

50Hz

## IP Rating

IP2XD

## Contact Gap Minimum

3mm

## Terminal Capacity 1

3x2.5mm<sup>2</sup>

## Terminal Capacity 2

2x4mm<sup>2</sup> Multi-Strand

## Terminal Capacity 3

1x6mm<sup>2</sup>

## Earth Terminal Capacity 1

6x1mm<sup>2</sup>

## Earth Terminal Capacity 2

5x1.5mm<sup>2</sup>

## Earth Terminal Capacity 3

3x2.5mm<sup>2</sup>

## Earth Terminal Capacity 4

2x4mm<sup>2</sup> Multi-Strand

## Earth Terminal Capacity 5

1x6mm<sup>2</sup>

## Product Class 1

Must be earthed

## Ambient Operating Temperature

-5° to +40°C

## Maximum Installation Altitude

2000m

## Standard/Approval

BS 1363-4

## Additional Notes

Cable Outlets Fitted with Clamps:Yes

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 2/28/2023 10:32:42 AM E&OE