

# DATASHEET

Code: 742J45W


## Hartland | HARTLAND RANGE | Telephone and Data Outlets

### Product Image



### Wiring

RJ45 CAT5e Rear View



RJ45 CAT5e and CAT6 Wiring Colour Codes

Pin No.	EIA Wiring Schedule	Colour Codes	Schedule 440B	Schedule 440B
1	WHITE / Green	WHITE / Orange	WHITE / Green	WHITE / Orange
2	GREEN / White	ORANGE / White	ORANGE / White	GREEN / White
3	WHITE / Orange	WHITE / Green	WHITE / Green	WHITE / Orange
4	BLUE / White	BLUE / White	BLUE / White	BLUE / White
5	WHITE / Blue	WHITE / Blue	WHITE / Blue	WHITE / Blue
6	ORANGE / White	GREEN / White	GREEN / White	ORANGE / White
7	WHITE / Brown	WHITE / Brown	WHITE / Brown	WHITE / Brown
8	BROWN / White	BROWN / White	BROWN / White	BROWN / White


Please always check with the colour coding found on the product.

Cable tie anchor

### Dimensions

**Hamilton®**  
HARTLAND  
2J45

2 gang RJ45 - CAT 5E Outlet Unshielded 8 wire

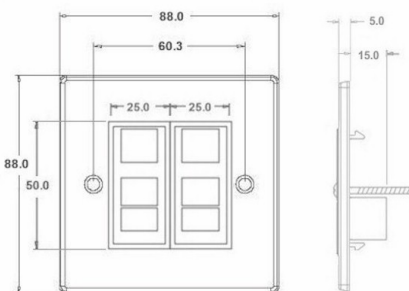

### Insert Type

2 gang RJ45 CAT 5E Outlet - Unshielded

### Insert Colour

White

### EAN13 Barcode

5028690240747

### Commodity Code

85176990

### Luckins TSI

385553324

### Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm

### Weight

100 GR

### Switched Poles

N/A

### Current Rating

n/a

### IP Rating

IP2XD

### Contact Gap Minimum

N/A

### Earth Terminal Capacity 1

5x1mm<sup>2</sup>

### Earth Terminal Capacity 2

4x1.5mm<sup>2</sup>

### Earth Terminal Capacity 3

3x2.5mm<sup>2</sup>

### Earth Terminal Capacity 4

1 x 4mm<sup>2</sup> Multi-Strand

### Earth Terminal Capacity 5

1x6mm<sup>2</sup>

### Product Class 1

Must be earthed (ref BS 7671 415.2.1)

### Ambient Operating Temperature

-5° to +40°C

### Recommended Location

Internal Use Only

### Maximum Installation Altitude

2000m

### Standard/Approval

N/A

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 2/28/2023 4:52:51 PM E&OE