

**Code:** 743XLEDITB100

## Hartland | HARTLAND RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers


### Product Image



### Wiring



### Dimensions

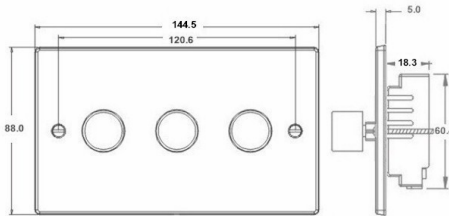

### Insert Type

3 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer

### Insert Colour

Satin Steel

### EAN13 Barcode

5017504079321

### Commodity Code

85365015

### Luckins TSI

403373651

### Dimensions(Nominal)

Double: Height = 88.0mm Width = 144.5mm Depth = 5.0mm

### Weight

397 GR

### Switched Poles

Single

### Current Rating

0.3A Per Gang

### Voltage

230V AC

### Maximum Load

5-70W Per Gang

### Mains Frequency

50Hz

### IP Rating

IP2XD

### Terminal Capacity 1

2X1mm<sup>2</sup>

### Terminal Capacity 2

2X1.5mm<sup>2</sup>

### Earth Terminal Capacity 1

5x1mm<sup>2</sup>

### Earth Terminal Capacity 2

4X1.5mm<sup>2</sup>

### Earth Terminal Capacity 3

3X2.5mm<sup>2</sup>

### Earth Terminal Capacity 4

1X4mm<sup>2</sup> Multi-Strand

### Earth Terminal Capacity 5

1X6mm<sup>2</sup>

### Product Class 1

Face plate must be earthed

### Ambient Operating Temperature

-5°C to +40°C

### Recommended Location

Internal Use Only

### Maximum Installation Altitude

2000m

### Standard/Approval

BS EN 60669-2-1

### Additional Notes

Trailing Edge & Leading Edge Dimmer

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 2/28/2023 4:43:22 PM E&OE