

**Classic Globe (GLS) 11W (75W) 5000K 1060lm B22 Non-Dimmable Frosted Lamp**

*Partcode: ILGLSB22NF016 / Page: 1*



This 11W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a cool white light and brightness, similar to a 75W filament bulb. It features high output LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for living rooms, hallways and kitchens.

**Product Details**

Partcode: ILGLSB22NF016

Check Code: 852564

Range Name: Mensae

Placement / Application: Indoor, General Lighting

Product Type: GLS

Warranty: 2 Years

CE / RoHS: Yes

**Physical Data**

Lamp Base: B22

Base Type: Bayonet cap

Base Colour: Matt white

Globe Type: Classic Globe (GLS)

Globe Finish: Frosted

Material: Aluminium, Polycarbonate, Nickel plated brass

Construction: Aluminium and Plastic heat-sink, Injection moulded diffuser

**Physical Data**

Length: 125mm  
Width: 60mm  
Weight (Unpackaged Single Unit): 148g  
Lamp or Luminaire Shape: Round


**Electrical Data**

Voltage Range: 220-240V  
Power Consumption: 11.0 Watts  
Driver included: Yes  
Driver IC Manufacturer: Silergy  
Electric Current: AC  
Ampage: 104.00mA  
Frequency Range: 50 Hz  
Power Factor:  $\geq 0.50$   
Wattage Equivalent: 75 Watts  
Dimming: Non-dimmable  
LVD Certified: Yes  
EN: EN-62560

**Light Data**

Lumens: 1,060lm  
Lumens per Watt: 96.0lm/W  
Beam Angle: 240°  
Correlated Colour Temperature (CCT): 5,000k  
Colour Temperature: Daylight  
Colour Rendering Index (CRI):  $\geq 80$   
LED Type: Surface mounted device (SMD)  
Instant on - Less than 1 second: Yes  
Lifetime: 15,000 hrs  
Switching Cycles:  $>7,500$  X

### Environmental

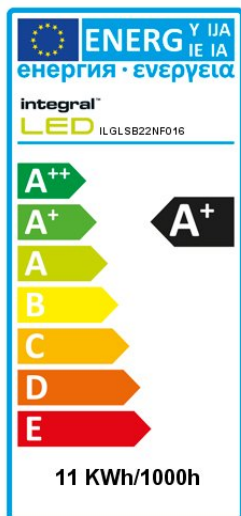

Energy Rating: A+

Lowest Operating Temperature: -20 degrees

Maximum Operating Temperature: 40 degrees

IP (Ingress Protection) Rating: IP20

Hg 0% (Mercury Free): Yes

### Packaging



EAN Barcode (unit of 1): 5055788208518

Packaged Weight (Unit of 1): 188g

Length (unit of 1): 140mm

Width (unit of 1): 68mm

Depth (unit of 1): 68mm

**Outer packaging info available on website**

*Product data last updated on: Thursday, October 25, 2018 - 15:30*