


Product Code: CLRCDP036

Description: 13A 2 Gang Type A Passive RCD Switched Socket Outlet

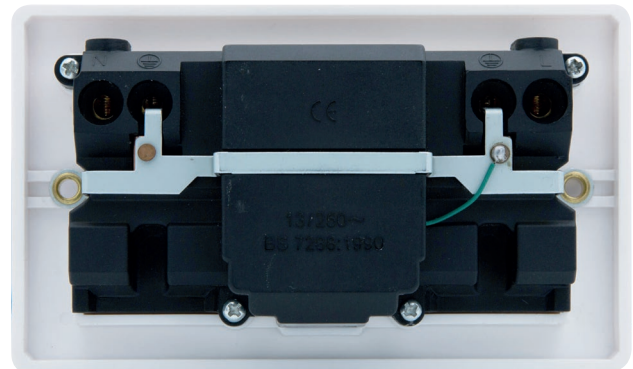

General Information

Dimensions (mm)	140 (W) x 80 (H) x 42 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Style	Metal Clad	
Finish	Metal Clad Grey	
Materials	Front Plate & Mounting Box: Electrophoretically Coated Steel	Insert & Rocker Switch: Urea
	Rear Housing: Urea	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass	Earth Strap: Mild Steel
	PCB: Mixed Components	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
Breaking Capacity (A)	250 (Earth Leakage)	
Through Fault Withstand (A)	1500	
Trip Speed	Less than 40ms at 150mA Residual Current	
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 3 x 4	
Single Pole Switched	Yes	
Twin Earth Terminals	Yes	
Supplied Back Box Depth (mm)	40	
Back Box Knockouts - Total (mm)	7 x Ø20	Back Box Knockouts - Sides (mm) 1 x Ø20
Back Box Knockouts - Top (mm)	3 x Ø20	Back Box Knockouts - Rear (mm) None
Back Box Knockouts - Bottom (mm)	2 x Ø20	
Back Box Earth Terminal Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.