



## *Fused Connection Units*



The smooth contemporary curves of the Deco Plus range are available in seven finishes to compliment any room.

Deco Plus Fused Connection Units provide large twin earth terminals as standard, which greatly facilitates wiring and installation.

All Deco Plus 13A Fused Connection Units are tested and approved to BS1363 offering assured quality and safety through our BSI Kitemark Licence KM10807.

## Fused Connection Units

### Product Range

#### Finish Comparison



Antique Brass (AB)



Polished Brass (BR)



Polished Chrome (CH)



Satin Chrome (SC)



Satin Brass (SB)



Black Nickel (BN)



Stainless Steel (SS)

V1.0

## Fused Connection Units

### Product Range

#### 13A Fused Connection Units

<b>DP**550##</b>	FCU 'Ingot' with Flex Outlet
<b>DP**551##</b>	FCU 'Ingot' Switched with Flex Outlet
<b>DP**552##</b>	FCU 'Ingot' Switched with Flex Outlet & Neon
<b>DP**553##</b>	FCU 'Ingot' with Flex Outlet & Neon
<b>DP**750##</b>	FCU 'Ingot'
<b>DP**751##</b>	FCU 'Ingot' Switched
<b>DP**752##</b>	FCU 'Ingot' Switched with Neon
<b>DP**753##</b>	FCU 'Ingot' with Neon



DPAB550BK



DPCH551WH



DPSC552BK



DPBR553WH



DPSS750WH



DPSB751BK




DPCH752WH



DPBN753BK



**Fused Connection Units**

**Product Dimensional Drawings (mm)**

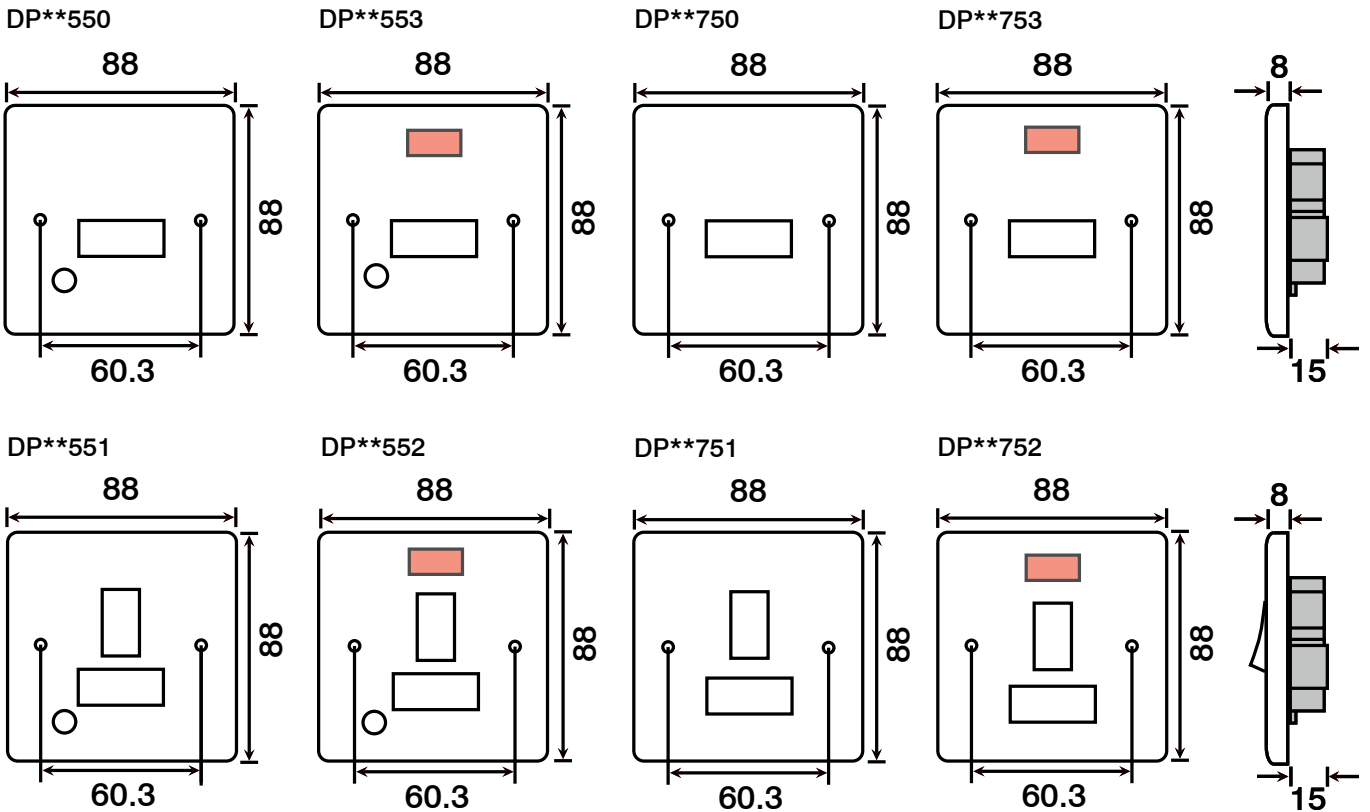

Fused Connection Units

Wiring Diagrams

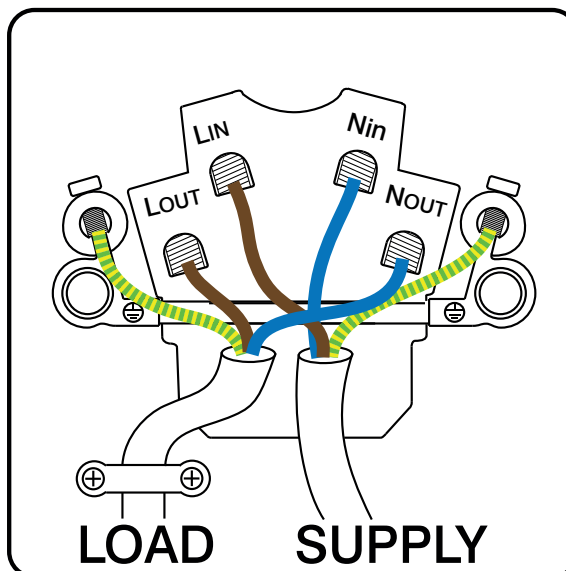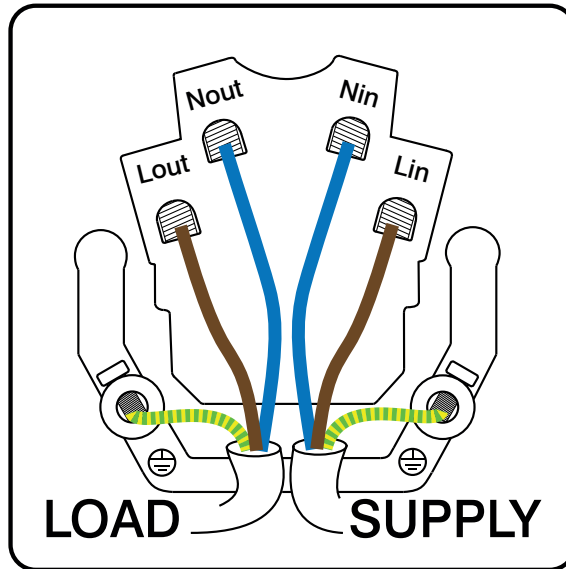

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Ltd, 1 Scolmore Park, Landsberg, Lichfield Road Ind. Estate, Tamworth, Staffordshire, B79 7XB

Telephone: 01827 63454

E-mail: sales@scolmore.com, technical@scolmore.com

Facsimile: 01827 63362

Website: www.scolmore.com

## Fused Connection Units

### Technical Specification

#### 13A Fused Connection Units

<b>Material Composition</b>	Front Plate: Stainless Steel
	Rear Housing: Urea
	Terminals: Brass
	Earth Strap: Mild Steel
	Terminal Screws: Steel & Yellow Passivated
	Silver "on-lay" Copper / Brass Contacts
<b>Voltage</b>	240V~ 50Hz
<b>Current Rating</b>	13A
<b>Terminal Size</b>	5mm $\varnothing$
<b>Torque Value</b>	2.5Nm
<b>Cable Size</b>	3 x 2.5mm <sup>2</sup> or 2 x 4.0mm <sup>2</sup>
<b>Double Pole</b>	(550, 551, 552, 553, 750, 751, 752, 753)
<b>Twin Earth</b>	Yes
<b>Cable Outlet Dia</b>	10mm $\varnothing$
<b>Back Box Depth</b>	25mm - 47mm
<b>Warranty</b>	10 Years
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5° to +40°C
<b>Standards</b>	BS 1363-4:1995+A4:2012 (KM10807 Kitemark License)
	Fuses to BS 1362:1973

#### Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



## EU DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,  
Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Deco Plus Range
  - a. *Group* Fused Connection Units
  - b. *Model No.* DP-550, DP-551, DP-552, DP-553, DP-750, DP-751, DP-752, DP-753

4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*

5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

KM10807 Kitemark License  
BS 1363-4 : 1995 + A4 : 2012  
BS 1362 : 1973 (Fuse)

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

*In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008.*

*This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited*

A handwritten signature in black ink that reads "Ross Turner".

Ross Turner - Technical Support Engineer