new media ™

Technical Specification

CLICK® ScolmoreGROUP

Product Code: MM030BK

Description: 15A 110V US Socket Outlet Module
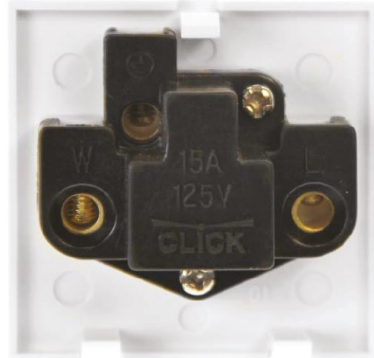
General Information

Dimensions (mm)	50 (W) x 50 (H) x 25.5 (D)
Finish	Black

Materials	Cover & Housing: Polycarbonate	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Internal Busbars: Formed Pressed Brass

Anti Microbial Certified	No		
Rated Voltage (V~) (Ue)	125	**Frequency (Hz)**	
Resistive Load Rating (A)	15		
Termination Type	Screw		
Terminal Size (mm)	Ø5	**Terminal Torque Value (Nm)**	1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4		
Minimum Back Box Depth (mm)	25 (35 Flat Plate)		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	1		

Additional Information   For cleaning / polishing of products, use only a soft, dry, clean cloth.
The US module requires a 125V 60Hz supply for use with US appliance plugs
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.